

GSI INTERSYSTEMS

TRUCK PROBES

UNCOMPROMISING QUALITY
BUILT TO PERFORM

GSI Take control.


CONSISTENT SAMPLING

InterSystems' Truck Probes provide representative and repeatable samples of grain, pellets, chips, flakes, granules and powders from trucks, rail cars, ships, tubs and other vessels. The heavy carbon steel stand, mast and boom support the double-wall steel sample probe, powered by a rugged hydraulic unit.

Models include 3, 5, 7.5 and 10 horsepower units with available booms extendable up to 16 ft. and compartmentalized or core type tips used to obtain samples. Compartmentalized tip probes fill the chambers by gravity. The interior cylinder rotates, closing the ports in the first chamber and allowing material to flow by gravity into the second chamber. During retraction or while the probe is still in the load, material flows to the bottom of the second chamber and is pneumatically drawn through a third chamber for delivery to a collection cabinet in the probe station. A core type sample probe extracts a vertical cylinder of material from the vessel without pulling dust or fines from the surrounding mass. The sample is then pneumatically transported to the collection point. The sample probe is mounted on a swivel stand and boom which are hydraulically powered in three axes.

InterSystems' complete Truck Probe system includes a vacuum system, collection cabinet, telescoping boom, hydraulic power unit, and controls. Probes for rail cars are available as well as mega probes which offer longer extendable booms, long-range sample delivery units and excess return systems.


COMPARTMENTALIZED TIP




Compartmentalized Tip Illustration



3 7/8" x 7/8" material ports open, filling the compartmentalized chambers by gravity as with a hand probe




The interior cylinder rotates, closing the ports in the first chamber and allowing material to flow by gravity into the second chamber




During retraction, or while the probe is still in the load, material flows to the bottom of the second chamber and is pneumatically drawn through a third chamber for delivery to a collection cabinet in the probe station


CORE TIP




Core Tip Illustration



Air and material to sample container

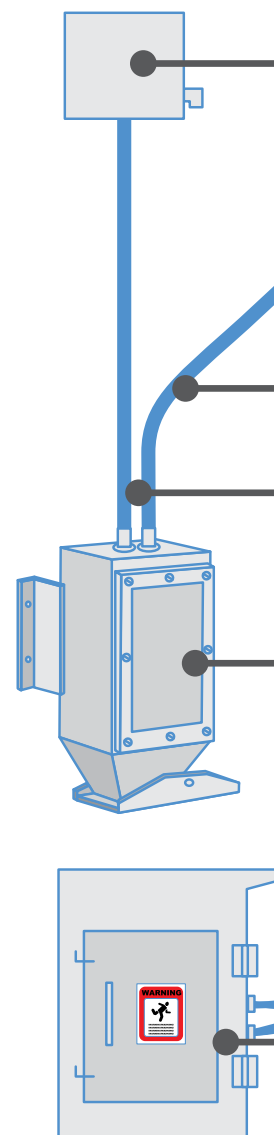

FEATURES

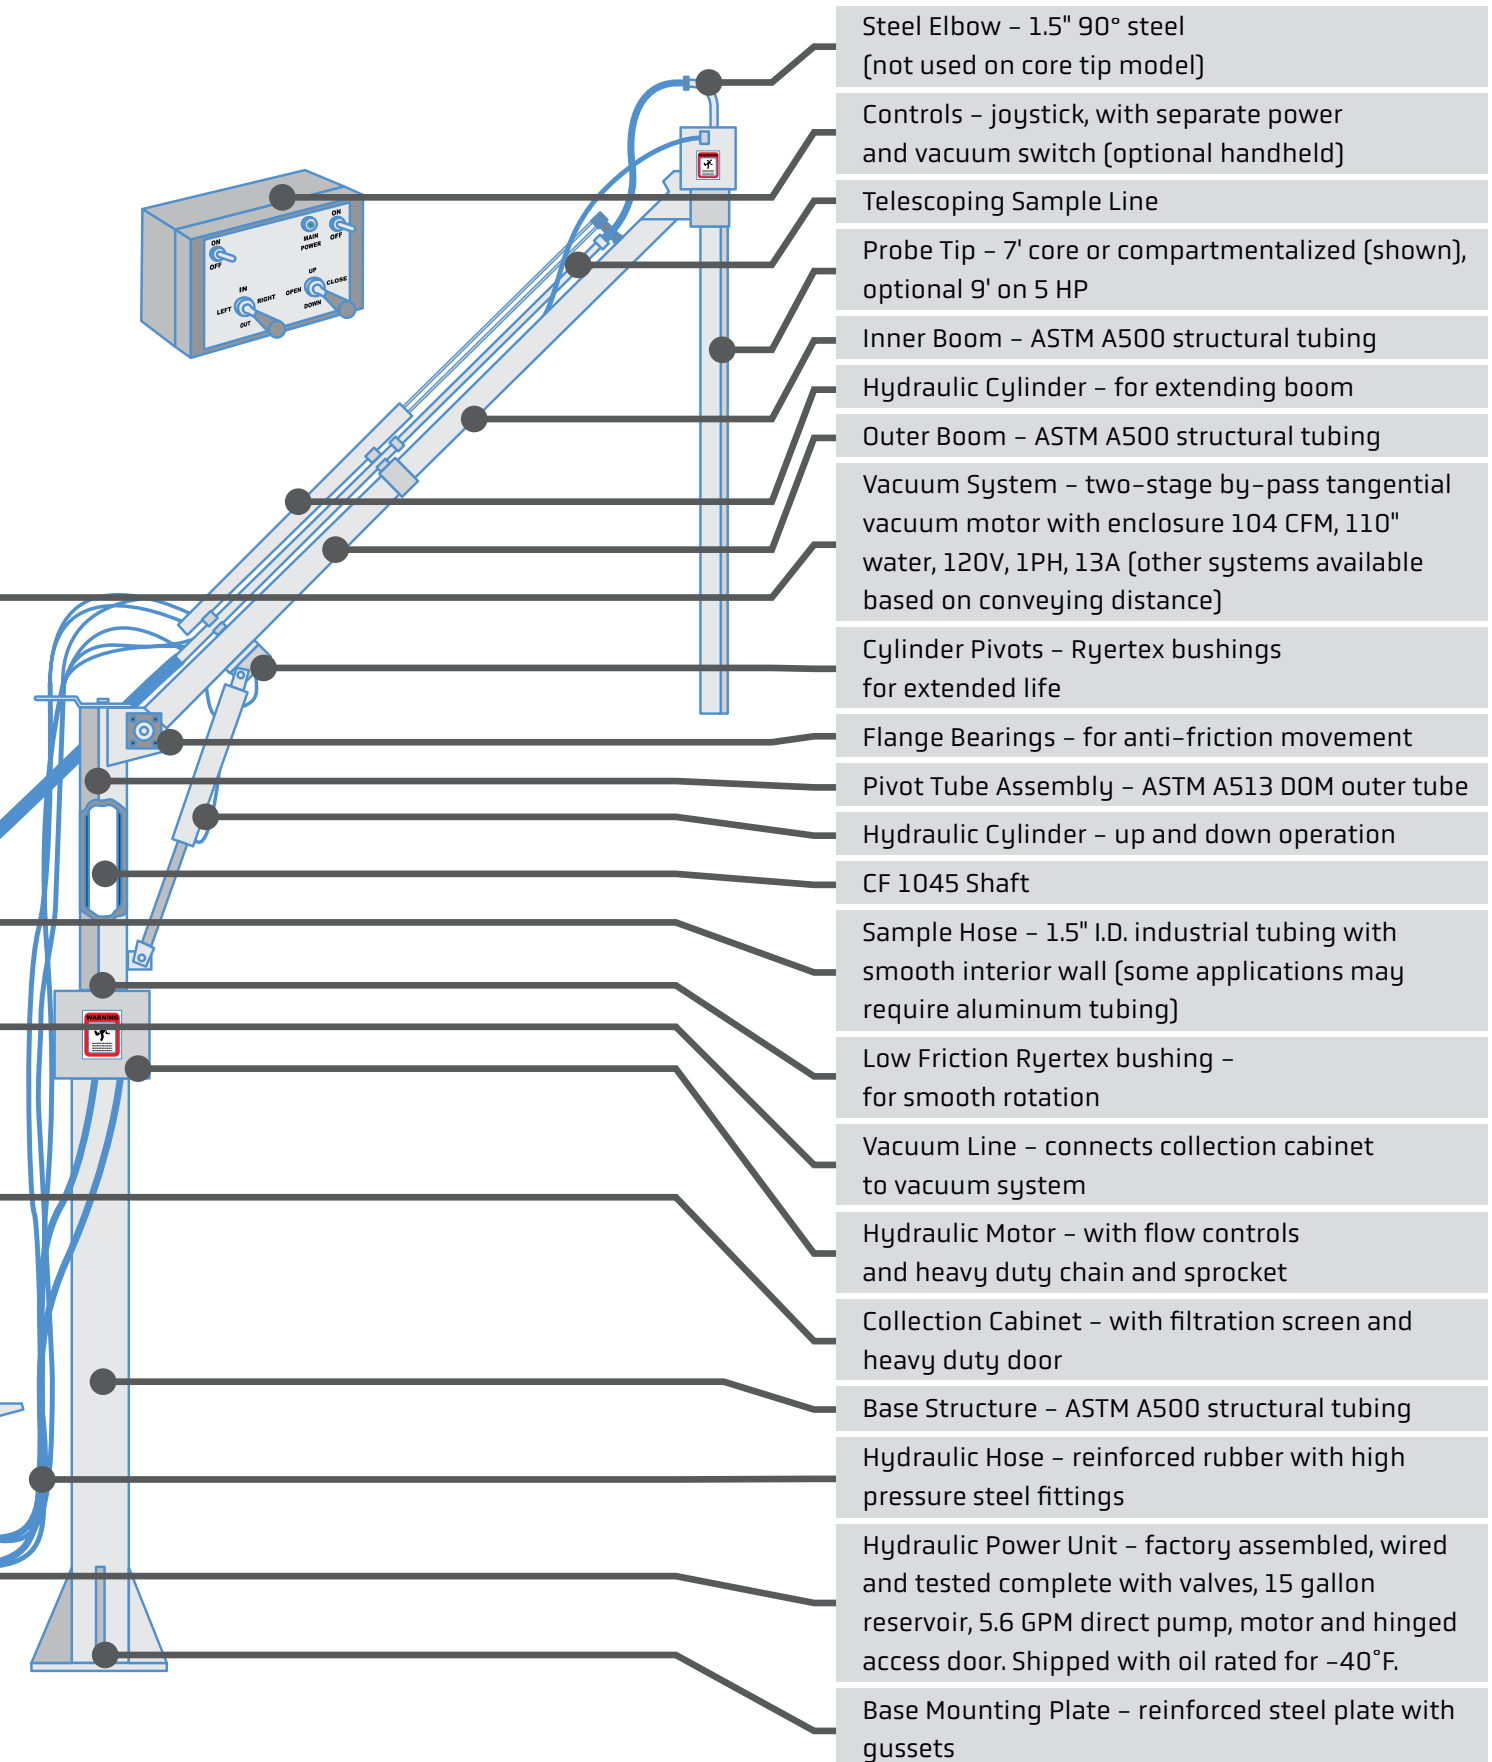

HYDRAULICS / STRUCTURE

	3 HP PROBE	5 HP SUPER PROBE	7.5 HP MEGA PROBE	RAIL / TRUCK PROBE
HYDRAULICS				
ELECTRICAL	3HP, TEFC, 230/460V, 9.6/4.8 amp, 3PH	5HP, TEFC, 230/460V, 15.2/7.6 amp, 3PH	75HP, 230/460V, 22/11 amp	10HP, 230/460V, 28/14 amp
OPTIONAL	3HP, TEFC, 115/230V, 34/17 amp, 1PH	5HP, TEFC, 115/230V, 56/28 amp, 1PH	10HP, 230V, 1PH	None
POWER UNIT	Gear pump, direct drive, 750 psi, 5.6 GPM, 15 gal reservoir in a 22"x32"x53" Nema 1 enclosure	Gear pump, direct drive, 1250 psi, 5.6 GPM, 15 gal reservoir in a 22"x32"x53" Nema 1 enclosure	Gear pump, direct drive, 1800 psi, 5.6 GPM, 15 gal reservoir in a 22"x40"x55" Nema 1 enclosure	Gear pump, direct drive, 1300 psi, 11 GPM, 30 gal reservoir in a 22"x40"x52" Nema 1 enclosure
CONTROLS	115V, 20 AMP, 1PH Dual vac: add'l 115V, 15 amp, 1PH	115V, 20 AMP, 1PH Dual vac: add'l 115V, 15 amp, 1PH	115V, 20 AMP, 1PH Dual vac: add'l 115V, 15 amp, 1 PH	115V, 20 AMP, 1PH Dual vac: add'l 115V, 15 amp, 1 PH
VACUUM	Two-stage by-pass, 1PH, 104 CFM, 110" water, 13 amp	Two-stage by-pass, 1PH, 104 CFM, 110" water, 13 amp	Two-stage by-pass, 1PH, 104 CFM, 110" water, 13 amp	Two-stage by-pass, 1PH, 104 CFM, 110" water, 13 amp
STRUCTURE				
INNER BOOM	3.5"x3.5"x.25" wall	4.5"x4.5"x.375" wall	4.5"x4.5"x.25" wall	9"x7"x.25" wall
OUTER BOOM	4"x4"x.1875" wall	5"x5"x.1875" wall	6"x6"x.375" wall	10"x8"x.375" wall
PIVOT TUBE	5"O.D.x.25" wall outer tube 4"O.D. CF 1045 shaft	7.75"O.D.x.375" wall outer tube 5"O.D. CF 1045 shaft	7.75"O.D.x.375" wall outer tube 6"O.D. CD 1045 shaft	10"O.D.x.5" wall outer tube 8"O.D. CD 1045 shaft
BASE	8"x8"x.375" wall Ryertex tee bushing; 1" pivot pin	10"x10"x.625" wall Ryertex tee bushing; 1.25" pivot pin	10"x10"x.625" wall Pivot tube sealed lower bearing; 1.375" pivot pin	16" round Sch. 40 pipe Ryertex tee bushing; 2" pivot pin
CONCRETE FOUNDATION	24" sq. x 60" deep	30" sq. x 72" deep	36" sq. x 72" deep	5' dia. x 120" deep

Visit grainsystems.com
for product specs and info



Contact your GSI Dealer for more information.

© 2026 Grain and Protein Technologies. All rights reserved.
GSI reserves the right to change designs and specifications without notice.

IS-108 / FEBRUARY 2026

