

SELECTTM
SELECT ISTM
CHAIN CONVEYORS

EASILY CUSTOMIZE

the Perfect Conveyor
for Your Project



Take control.



CUSTOM WITHOUT COMPROMISE.

Material handling can be complicated. So, we've made it easier than ever for you to get the right tool for the job, every time.

YOUR EXACT SPEC

Enjoy limitless custom configurations with the right sizes, layouts, capacities, options and accessories – it's your choice and it's almost all standard. We also offer options for the commercial-grade features you want, such as wear liners and bearings.

QUICK DETAILED QUOTE

Get comprehensive, real-time drawings and a complete spec document with every quote.

SERIOUSLY RELIABLE PERFORMANCE

We've taken the best design elements and combined them into one platform. You get the superior craftsmanship, commercial-grade dependability and easy maintenance you've come to expect for decades of reliable and profitable service.

DESIGNED FOR WIDER APPLICATION

Gain greater flexibility with a wider selection of features and options.

A HIGHER STANDARD

Hot dip galvanized or stainless steel finish, our most durable AR500 liner and S-Path alignment are all exclusive options.

SELECT[™]

All the essentials and you can add features and options and customize to get what you want.

SELECT IS[™]

More standard features built in and exclusive options you can't get with SELECT model.

Engineering approvals and certified drawings are standard with Select IS.

GSI Select IS comes standard with split sprockets, high-end roller bearings, and AGMA Class II drives, with optional Class III upgrade, for maximum durability & serviceability.



Select™ and Select IS™ En-Masse Chain Conveyors

SIZE (HEIGHT)	CAPACITY RANGE (BPH) ¹	BEND AND INCLINE MAXIMUM	FINISH ²
12"	21-6,750	~ 14°	Painted, Galvanized, Hot Dip, or Stainless Steel
14"	47-11,074		
20"	66-27,000		
26"	164-36,281		
32"	260-52,749		

Select™ and Select IS™ Hi-Flight Chain Conveyors

SIZE (HEIGHT)	CAPACITY RANGE (BPH) ¹	BEND AND INCLINE MAXIMUM	FINISH ²
12"	20-4,821	15° - 60°	Painted, Galvanized, Hot Dip, or Stainless Steel
14"	32-7,594		
20"	42-17,236		
26"	104-23,022		
32"	160-32,409		

Select IS™ Kleen-Drag Chain Conveyors

SIZE (HEIGHT)	CAPACITY RANGE (BPH) ¹	BEND AND INCLINE MAXIMUM	FINISH ²
12"	23-7,533	Varies	Painted, Galvanized, Hot Dip, or Stainless Steel
14"	47-11,070		
20"	65-27,000		

¹ Capacities calculated with no side liners, thicker side liners will reduce capacity

² Hot Dip and Stainless finishes available only on Select IS model

Select™ and Select IS™ En-Masse Chain Conveyors

Head and tail sections feature Dodge® pillow block bearings standard, with full-coverage safety guarding.

Intermediate sections feature welded 2" structural steel angle flanges to provide rigidity and accurate alignment. Three standard cover styles to meet any need and ensure weather-tight operation.

Steel Bushed Roller (SBR) and Welded Mill (WM) chains available to suit any application. UHMW flight pads prevent steel-to-steel contact with Nylon optional for hot or abrasive materials.

Flush style design standard for both intermediate and head gates to minimize cross-contamination. Chain carry over bars are laser cut into 3/8" abrasion resistant plate bottom for superior alignment. Inline or crosscut style gates are available.



Select™ and Select IS™ Hi-Flight Chain Conveyors

The ideal solution for steeper inclines or pit applications.

Features the same heavy-duty and maintenance-friendly features as the Select™ line of En-Masse conveyors.

Utilizes a taller chain flight paddle to improve performance on steeper inclines.



Select IS™ Kleen-Drag Chain Conveyors

Available exclusively as the Select IS™ model.

Perfect solution in applications where cross-contamination is a primary concern, such as conveying feed products, or other sensitive commodities.

Combines a unique trapezoidal trough shape to ensure positive clean-out with the same heavy-duty and maintenance-friendly features as the rest of the Select™ line of chain conveyors.



SPECIFICATIONS

SELECT™ AND SELECT IS™ EN-MASSE CHAIN CONVEYORS

CAPACITIES

Size (W x H)	1*	100*	110*	120*	130*	140*	150*	160*	170*	180*
9"x12"	21	2,109	2,320	2,531	2,742	2,953	3,164	3,375	3,586	3,797
12"x12"	28	2,812	3,094	3,375	3,656	3,937	4,219	4,500	4,781	5,062
16"x12"	37	3,750	4,125	4,500	4,875	5,250	5,625	6,000	6,375	6,750
16"x14"	47	4,687	5,156	5,625	6,094	6,562	7,031	7,500	7,969	8,437
21"x14"	62	6,152	6,768	7,383	7,998	8,613	9,228	9,844	10,459	11,074
14"x20"	66	6,562	7,219	7,875	8,531	9,187	9,844	10,500	11,156	11,812
16"x20"	75	7,500	8,250	9,000	9,750	10,500	11,250	12,000	12,750	13,500
20"x20"	94	9,375	10,312	11,250	12,187	13,125	14,062	15,000	15,937	16,875
26"x20"	122	12,187	13,406	14,625	15,844	17,062	18,281	19,500	20,719	21,937
32"x20"	150	15,000	16,500	18,000	19,500	21,000	22,500	24,000	25,500	27,000
26"x26"	164	16,377	18,014	19,652	21,290	22,928	24,565	26,203	27,841	29,478
32"x26"	202	20,156	22,172	24,187	26,203	28,218	30,234	32,250	34,265	36,281
32"x32"	260	26,049	28,654	31,259	33,864	36,468	39,073	41,678	44,283	46,888
36"x32"	293	29,305	32,235	35,166	38,096	41,027	43,957	46,888	49,818	52,749


DIMENSIONS

Box Size (W x H)	Overall Width	Overall Height^	Grain Depth	Head Length	Discharge Length	Tail Length (Standard)	Tail Length (Clean-out)	Y-Style Bypass Height^	Y-Style Bypass Width	Y-Style Bypass Height^	V-Style Bypass Width	Dump Hopper Height^	Dump Hopper Width
A x B	C	D	E	F	G	H	H	I	J	K	L	M	N
9"x12"	13	14.53	7.00	36	36	36	24	22.69	25	22.69	50	30.94	54.50
12"x12"	16	14.61	7.00	36	36	36	24	24.19	28	24.19	56	30.94	54.50
16"x12"	20	14.71	7.00	36	36	36	24	26.19	32	26.19	64	30.94	54.50
16"x14"	20	16.71	8.75	36	36	36	24	28.19	32	28.19	68	38.06	58.50
21"x14"	25	16.84	8.75	36	36	36	24	30.69	37	30.69	78	38.06	58.50
14"x20"	18	22.66	14.00	36	36	36	24	33.19	38	33.19	76	44.06	66.00
16"x20"	20	22.71	14.00	36	36	36	24	34.19	40	34.19	80	44.06	66.00
20"x20"	24	22.82	14.00	36	36	36	24	36.19	44	36.19	88	44.06	66.00
26"x20"	30	22.97	14.00	36	36	36	24	39.19	50	39.19	100	44.06	66.00
32"x20"	36	23.13	14.00	36	36	36	24	42.19	56	42.19	112	44.06	66.00
26"x26"	30	28.97	18.81	48	36	48	42	45.19	50	45.19	112	54.19	66.00
32"x26"	36	29.13	18.81	48	36	48	42	48.19	56	48.19	124	54.19	66.00
32"x32"	36	35.13	24.31	48	36	48	42	56.19	60	56.19	140	59.19	66.00
36"x32"	40	35.24	24.31	48	36	48	42	56.19	60	56.19	144	59.19	66.00

+ Conveyor speed in feet per minute.

^ Based on 3/16 bottom liner and lapped covers, heavier bottom liners and alternate cover styles will increase this dimension.

Capacities calculated with no side liners, thicker side liners will reduce capacity.

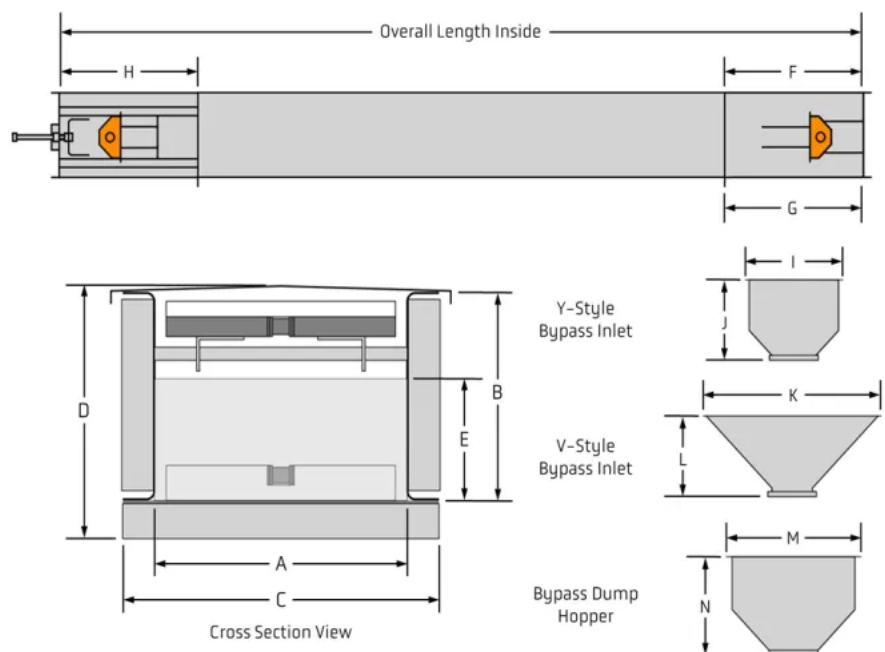

SPECIFICATIONS

SELECT™ AND SELECT IS™ HI-FLIGHT CHAIN CONVEYORS

CAPACITIES

Size (W x H)	1*	100*	110*	120*	130*	140*	150*	160*	170*	180*
12"x12"	20	2,009	2,210	2,411	2,612	2,812	3,013	3,214	3,415	3,616
16"x12"	27	2,679	2,946	3,214	3,482	3,750	4,018	4,286	4,554	4,821
16"x14"	32	3,214	3,536	3,857	4,179	4,500	4,821	5,143	5,464	5,786
21"x14"	42	4,219	4,641	5,062	5,484	5,906	6,328	6,750	7,172	7,594
14"x20"	42	4,189	4,608	5,027	5,446	5,865	6,284	6,703	7,122	7,541
16"x20"	48	4,788	5,267	5,745	6,224	6,703	7,182	7,661	8,139	8,618
20"x20"	60	5,985	6,583	7,182	7,780	8,379	8,977	9,576	10,174	10,773
26"x20"	78	7,780	8,558	9,336	10,114	10,892	11,671	12,449	13,227	14,005
32"x20"	96	9,576	10,533	11,491	12,449	13,406	14,364	15,321	16,279	17,236
26"x26"	104	10,392	11,431	12,470	13,510	14,549	15,588	16,627	17,666	18,705
32"x26"	128	12,790	14,069	15,348	16,627	17,906	19,185	20,464	21,743	23,022
32"x32"	160	16,004	17,605	19,205	20,806	22,406	24,006	25,607	27,207	28,808
36"x32"	180	18,005	19,805	21,606	23,406	25,207	27,007	28,808	30,608	32,409


DIMENSIONS

Box Size (W x H)	Overall Width	Overall Height^	Head Height	Tail Height	Grain Depth	Head Length	Discharge Length	Tail Length	Y-Style Bypass Height^	Y-Style Bypass Width	Y-Style Bypass Height^	V-Style Bypass Width	Dump Hopper Height^	Dump Hopper Width
A x B	C	D	D1	D2	E	F	G	H	I	J	K	L	M	N
12"x12"	16	14.61	17.06	15.50	5.00	60	36	42	24.19	28	24.19	56	30.94	54.50
16"x12"	20	14.71	17.06	15.50	5.00	60	36	42	26.19	32	26.19	64	30.94	54.50
16"x14"	20	16.71	19.75	18.56	6.00	60	36	42	28.19	32	28.19	68	38.06	58.50
21"x14"	25	16.84	19.75	18.56	6.00	60	36	42	30.69	37	30.69	78	38.06	58.50
14"x20"	18	22.66	26.88	26.88	8.94	72	36	60	33.19	38	33.19	76	44.06	66.00
16"x20"	20	22.71	26.88	26.88	8.94	72	36	60	34.19	40	34.19	80	44.06	66.00
20"x20"	24	22.82	26.88	26.88	8.94	72	36	60	36.19	44	36.19	88	44.06	66.00
26"x20"	30	22.97	26.88	26.88	8.94	72	36	60	39.19	50	39.19	100	44.06	66.00
32"x20"	36	23.13	26.88	26.88	8.94	72	36	60	42.19	56	42.19	112	44.06	66.00
26"x26"	30	28.97	34.56	30.88	11.94	96	42	66	45.19	50	45.19	112	54.19	66.00
32"x26"	36	29.13	34.56	30.88	11.94	96	42	66	48.19	56	48.19	124	54.19	66.00
32"x32"	36	35.13	41.31	37.44	14.94	102	48	72	56.19	60	56.19	140	59.19	66.00
36"x32"	40	35.24	41.31	37.44	14.94	102	48	72	56.19	60	56.19	144	59.19	66.00

+ Conveyor speed in feet per minute.

^ Based on 3/16 bottom liner and lapped covers, heavier bottom liners and alternate cover styles will increase this dimension.

Capacities calculated with no side liners, thicker side liners will reduce capacity.

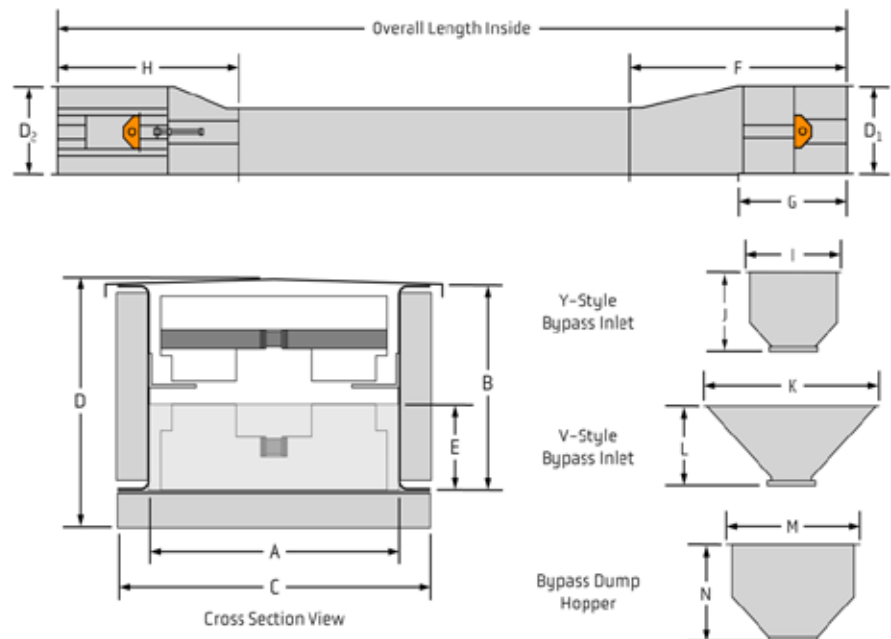

SPECIFICATIONS

SELECT IS™ KLEEN-DRAG CHAIN CONVEYORS

CAPACITIES

Size [W x H]	1*	100*	110*	120*	130*	140*	150*	160*	170*	180*
9"x12"	23	2,296	2,525	2,755	2,984	3,214	3,443	3,673	3,903	4,132
12"x12"	31	3,105	3,416	3,727	4,037	4,348	4,658	4,969	5,279	5,590
16"x12"	42	4,185	4,604	5,022	5,441	5,859	6,278	6,696	7,115	7,533
16"x14"	47	4,654	5,119	5,585	6,050	6,516	6,981	7,446	7,912	8,377
21"x14"	62	6,150	6,765	7,380	7,995	8,610	9,225	9,840	10,455	11,070
14"x20"	65	6,487	7,136	7,785	8,433	9,082	9,731	10,379	11,028	11,677
16"x20"	74	7,433	8,176	8,920	9,663	10,406	11,149	11,893	12,636	13,379
20"x20"	93	9,325	10,257	11,190	12,122	13,055	13,987	14,920	15,852	16,784
26"x20"	122	12,162	13,379	14,595	15,811	17,027	18,243	19,460	20,676	21,892
32"x20"	150	15,000	16,500	18,000	19,500	21,000	22,500	24,000	25,500	27,000


DIMENSIONS

Box Size [W x H]	Vertical Offset	Overall Width	Overall Height^	Grain Depth	Head Length	Discharge Length	Tail Length	Y-Style Bypass Height^	Y-Style Bypass Width	Y-Style Bypass Height^	V-Style Bypass Width	Dump Hopper Height^	Dump Hopper Width
A x B	B1	C	D	E	F	G	H	I	J	K	L	M	N
9"x12"	2	13	16.39	8.06	36	36	21	24.55	25	24.55	50	32.80	54.50
12"x12"	2	16	16.47	8.06	36	36	21	26.05	28	26.05	56	32.80	54.50
16"x12"	2	20	16.58	8.06	36	36	21	28.05	32	28.05	64	32.80	54.50
16"x14"	2	20	18.58	8.94	36	36	21	30.05	32	30.05	68	39.93	58.50
21"x14"	2	25	18.71	8.94	36	36	21	32.55	37	32.55	78	39.93	58.50
14"x20"	2	18	24.53	14.13	36	36	25	35.05	38	35.05	76	45.93	66.00
16"x20"	2	20	24.58	14.13	36	36	25	36.05	40	36.05	80	45.93	66.00
20"x20"	2	24	24.68	14.13	36	36	25	38.05	44	38.05	88	45.93	66.00
26"x20"	2	30	24.84	14.13	36	36	25	41.05	50	41.05	100	45.93	66.00
32"x20"	2	36	25.00	14.13	36	36	25	44.05	56	44.05	112	45.93	66.00

+ Conveyor speed in feet per minute.

^ Based on 3/16 bottom liner and lapped covers, heavier bottom liners and alternate cover styles will increase this dimension.

Capacities calculated with no side liners, thicker side liners will reduce capacity.

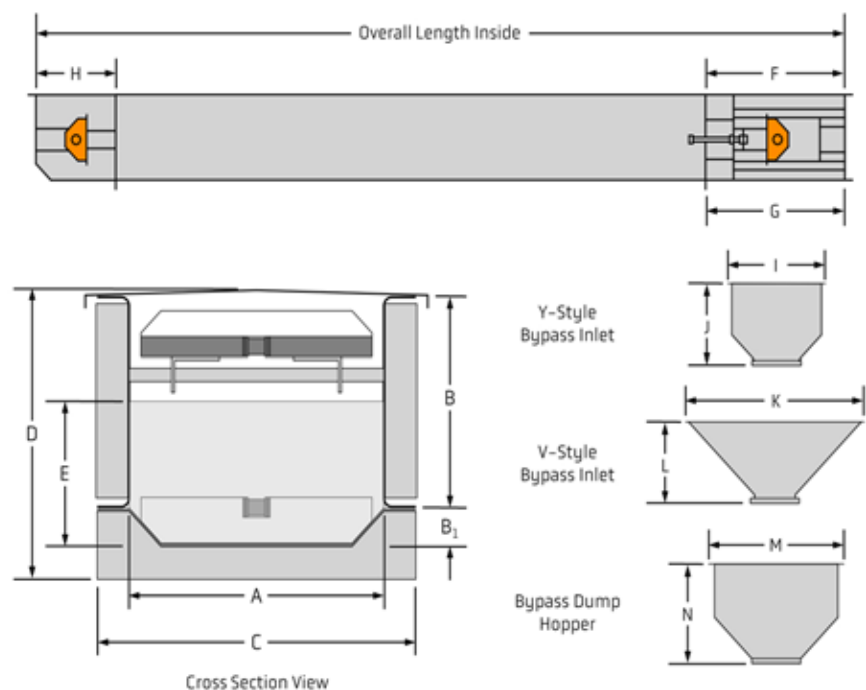



Visit grainsystems.com
for product specs and info



Contact your GSI Dealer for more information.

© 2026 Grain and Protein Technologies. All rights reserved.
GSI reserves the right to change designs and specifications without notice.

GS-016 / JANUARY 2026

